


TOOLING FINGER SPRINGS are made from the finest spring steel. They are carefully fashioned and heat-treated. All sizes are standardized and are **IN STOCK**, ready to ship for your application.

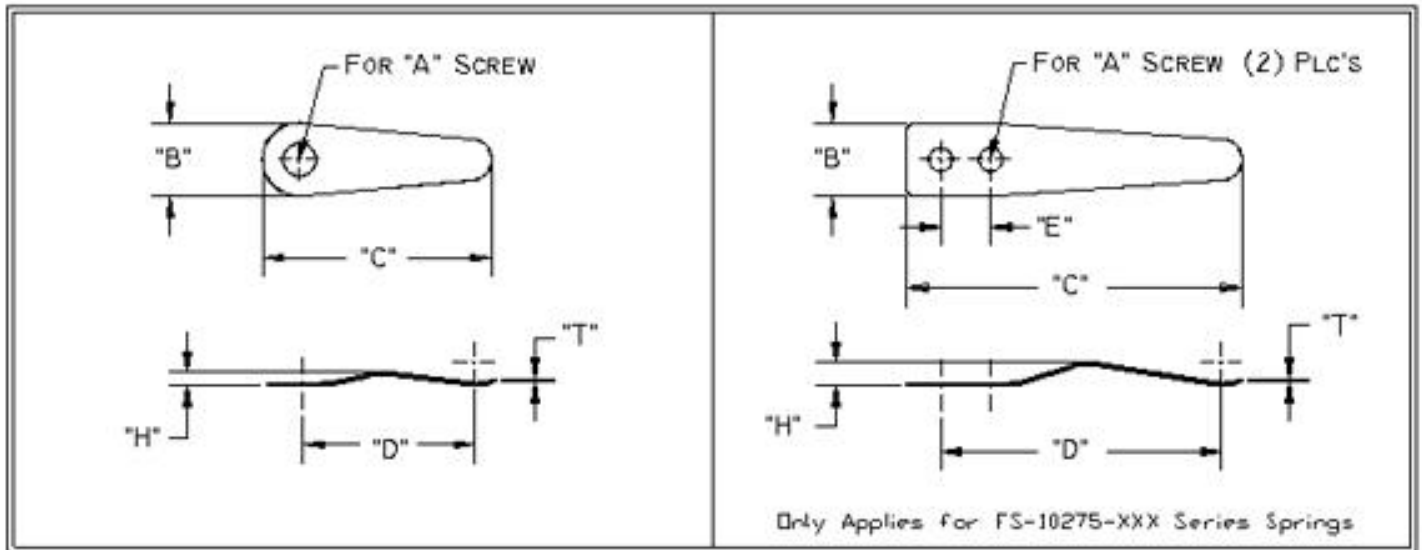

SPECIFICATION OF FINGER SPRING

PART No:		"A"		"B"	"C"	"D"	"E"	"H"	"T"
T.R. GOLDSMITH	ALSCO	SIZE	QTY						
FS-6100-010*	A1	NO.6	1	.32"	1.00"	.75"	N/A	.06"	.010"
FS-6100-015*	A2	NO.6	1	.32"	1.00"	.75"	N/A	.06"	.015"
FS-8150-015*	B1	NO.8	1	.38"	1.50"	1.18"	N/A	.13"	.015"
FS-8150-020*	B2	NO.8	1	.38"	1.50"	1.18"	N/A	.13"	.020"
FS-10200-020	C1	NO.10	1	.44"	2.00"	1.65"	N/A	.16"	.020"
FS-10200-025	C2	NO.10	1	.44"	2.00"	1.65"	N/A	.16"	.025"
FS-10275-025	D1	NO.10	2	.50"	2.75"	2.30"	.44"	.13"	.025"
FS-10275-032	D2	NO.10	2	.50"	2.75"	2.30"	.44"	.13"	.032"

* ARE SELF LOCKING USING 3 LOCKING EARS AROUND SCREW

ATLANTA
404-691-6418

ROCHESTER
585-617-4187

TONAWANDA
716-695-2247