


T.R. Goldsmith & Son, Inc
TYPICAL SPRING PIN APPLICATIONS

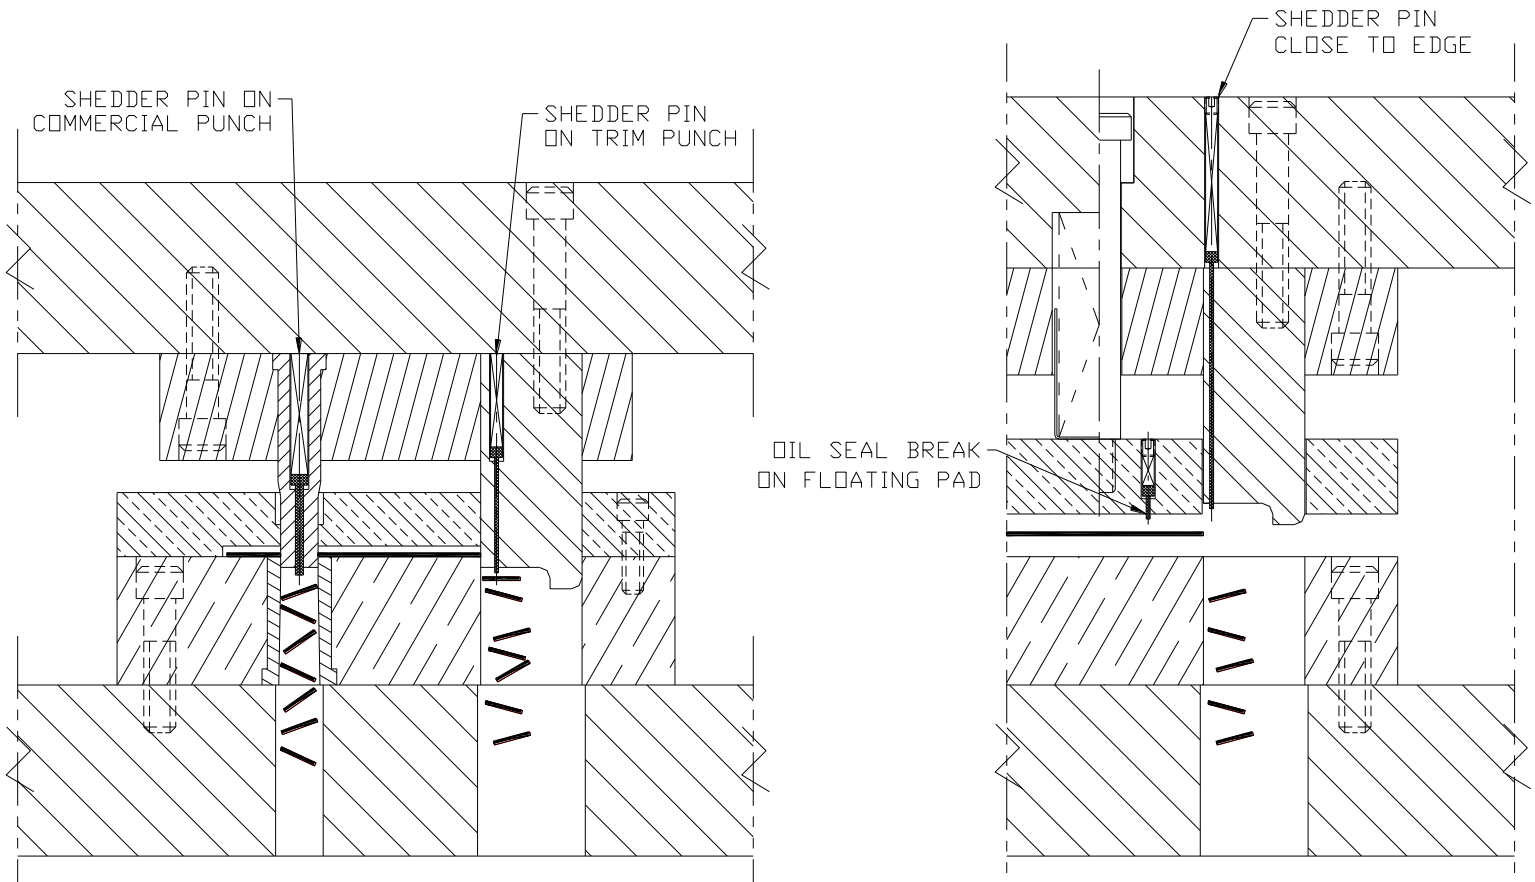

Ordering Information

Packages contain 25 units. One unit consists of Pin/Spring assembly and set screw.

Metric Sizes

Part No.	Pin Size	Pin Hole	Spring Size	Spring Hole	Screw
GPM-508	.50 Ø x 76.2	.65 Ø	1.95 Ø x 57mm	2.05 Ø	M2.5 x 5mm
GPM-660	.65 Ø x 76.2	.80 Ø	2.40 Ø x 57mm	2.50 Ø	M3 x 5mm
GPM-1040	1.00 Ø x 76.2	1.20 Ø	3.20 Ø x 59mm	3.30 Ø	M4 x 5mm
GPM-1400	1.40 Ø x 101.6	1.60 Ø	4.10 Ø x 70mm	4.20 Ø	M5 x 5mm
GPM-2180	2.20 Ø x 101.6	2.40 Ø	4.90 Ø x 76mm	5.00 Ø	M6 x 6mm
GPM-3760	3.75 Ø x 101.6	4.00 Ø	8.40 Ø x 89mm	8.50 Ø	M10 x 8mm

Installation Instructions:

Pin and spring can be cut to length as needed.

For maximum life:

Pre-load on spring should not exceed 1/8" and travel should be limited to 1/16".

ATLANTA 1-877-452-6462	ROCHESTER 1-800-333-2659	TONAWANDA 1-800-252-2501
---------------------------	-----------------------------	-----------------------------