


T.R. Goldsmith & Son, Inc
TYPICAL SPRING PIN APPLICATIONS

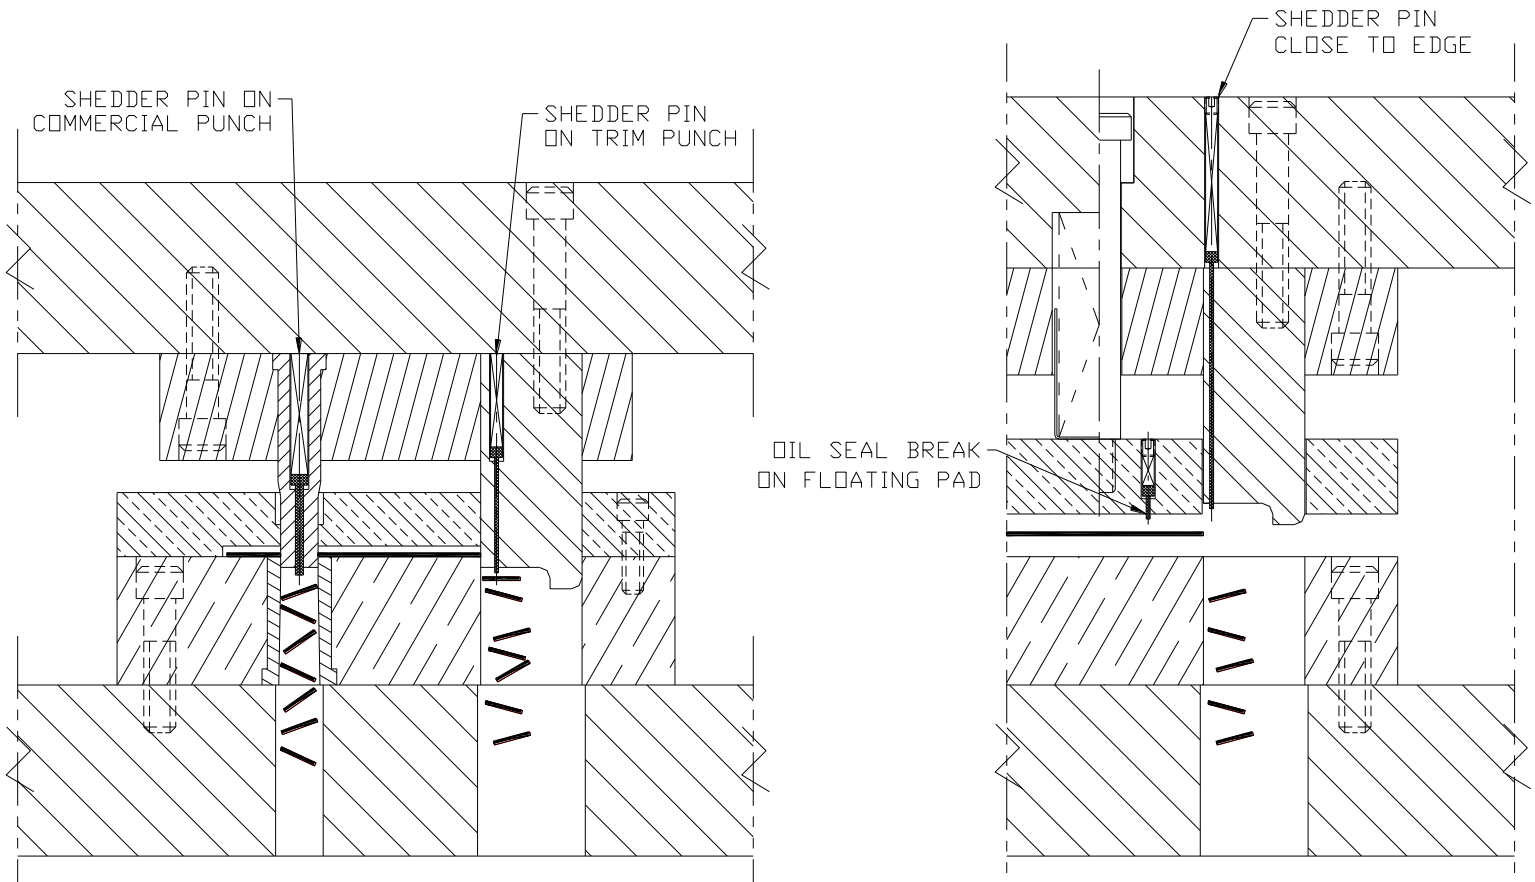

Ordering Information

Packages contain 25 units. One unit consists of Pin/Spring assembly and set screw.

Standard Sizes

Part No.	Pin Size	Pin Hole	Spring Size	Spring Hole	Screw
GP-20	.020" Ø x 3.0"	.025" Ø	.082" Ø x 2.0"	.086" Ø	3-48 x .188"
GP-26	.026" Ø x 3.0"	.031" Ø	.105" Ø x 2.25"	.109" Ø	5-40 x .188"
GP-41	.041" Ø x 3.0"	.046" Ø	.140" Ø x 2.50"	.144" Ø	8-32 x .188"
GP-55	.055" Ø x 4.0"	.062" Ø	.162" Ø x 2.75"	.166" Ø	10-32 x .188"
GP-86	.086" Ø x 4.0"	.094" Ø	.217" Ø x 3.0"	.221" Ø	¼-28 x .250"
GP-148	.148 Ø x 4.0"	.156" Ø	.308 Ø x 3.50"	.312" Ø	3/8-16 x .313"

Installation Instructions:

Pin and spring can be cut to length as needed.

For maximum life:

Pre-load on spring should not exceed 1/8" and travel should be limited to 1/16".

ATLANTA 1-877-452-6462	ROCHESTER 1-800-333-2659	TONAWANDA 1-800-252-2501
---------------------------	-----------------------------	-----------------------------