
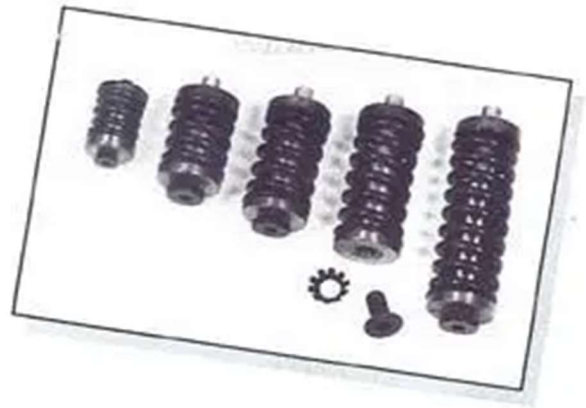


## Stripping Spring Assemblies

### COIL SPRING SERIES Medium Pressure

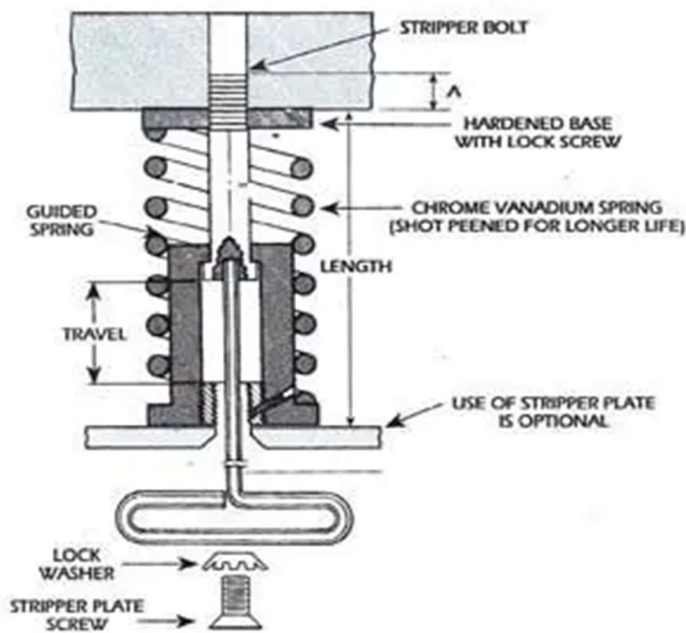

### Stripping Spring Assemblies Recommended Use; 75% or Less of Available Travel

CATALOG NO.	LENGTH	OUTSIDE DIAMETER	DIM. 'A'	STRIPPER BOLT & PLATE SIZE	HEX WRENCH SIZE	AVAILABLE TRAVEL	LOAD (LBS) PER 1/8" TRAVEL	PRE-LOAD (LBS)	MAX LOAD (LBS)	WEIGHT EACH
A-150	1-1/2"	1"	.250	1/4-20	5/32	5/16	41	125	230	4 oz.
A-200	2"	1-5/16"	.500	3/8-24	3/16	7/16	85	250	545	9 oz.
A-250	2-1/2"	1-5/16"	.500	3/8-24	3/16	9/16	75	230	570	10 oz.
A-300	3"	1-5/16"	.500	3/8-24	3/16	13/16	60	200	590	11 oz.
A-400	4"	1-5/16"	.500	3/8-24	3/16	1-1/16	40	170	510	13 oz.

- The coil spring assemblies are designed for medium pressure applications in blanking, piercing and forming dies-plus many other uses. Simply, drill and tap 3/8" - 24 location holes for each assembly. (1/4" - 20 tap for catalog A-I 50).
- The assemblies can be used with or without a stripper plate if the design is suitable. A 3/8" - 24 x 3/4" LG. FLAT HEAD SCREW WITH LOCK WASHER IS FURNISHED FOR RETAINING A 1/4" THICK STRIPPERPLATE. (1/4" - 20 X 11/2" SCREW FOR CAT. A-150 ONLY.)
- If a stripper plate is used, caution must be used to make sure the screw does not enter the travel area as shown in drawing provided. Cap screws may be used for holding the stripper plate however, this would require a much thicker plate to accommodate the thicker head on the screw. Some users save additional time and money by only attaching a portion of the assemblies to the stripper plate, provided the design is suitable.

**Call today for current pricing; 1-800-333-2659**  
**quotes@trgoldsmith.com**